


**12mm Stem Elbow Connector**

The John Guest 12mm Stem Elbow Connector has been developed to satisfy the requirements of the European and Australian plumbing markets. It has been designed and manufactured to meet the requirements of ISO 15875/21003, CLASS 2/10 bar, CLASS 5/6 bar (S3.2 pipe). It is suitable for use with PE-X pipe conforming to the requirements of ISO 15875-2 dimension CLASS A.

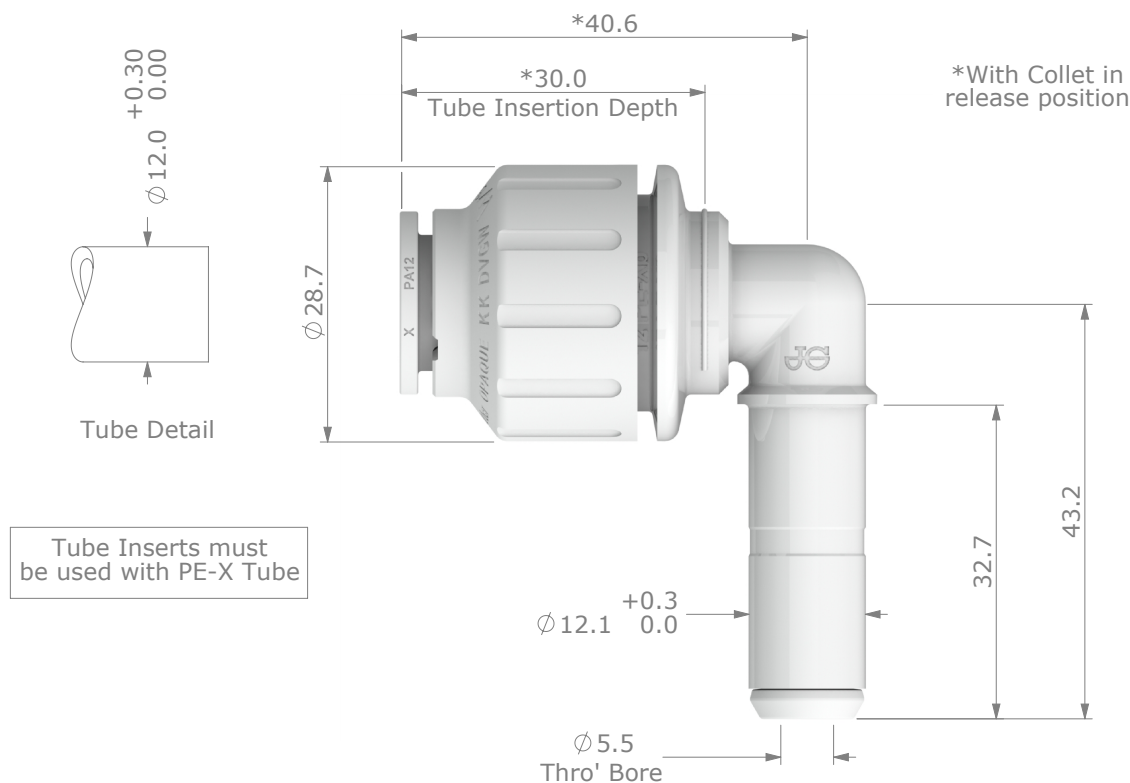

Country	Certification	Standard
Germany	DVGW	W534 / KTW / W270
The Netherlands	KIWA / KOMO	BRL K536 / 5606
Australia	WATERMARK	AS4176.3 / AS4020

Dimensions in mm

**Parts List**

Part Description	Material	Part Description	Material
Body	Polyethylene (Cross Linked), White	Compression Ring	Nylon 12 (Glass Filled), Grey
Cap	Nylon 66 (Mineral Filled), White	O'Ring	EPDM (Ethylene Propylene), Black
Collet	Nylon 12 (Glass Filled), White & Stainless Steel	Tube Support	Polysulphone, White

**Technical Information**

Working Pressures & Temperatures	Applications
Max. 20 bar at 20 °C   10 bar at 70 °C   6.0 bar at 95 °C	Domestic Plumbing, Hot & Cold Water ✓
Minimum Temperature 1 °C	Central Heating ✓